



Exceptional service in the national interest



# Current Status of the Three ARM Raman Lidars

John Goldsmith

Sandia National Laboratories  
PO Box 969, MS 9115, Livermore, CA 94551-0969  
jgold@sandia.gov, 925-294-2432

Rob Newsom


Pacific Northwest National Laboratory  
PO Box 999, MS K9-30, Richland, WA 99352  
rob.newsom@pnl.gov, 509-372-6020

Dave Turner


NOAA / Earth System Res. Lab. / Global Sys. Div.  
Boulder, CO 80305  
dave.turner@noaa.gov, 303-497-6097

The ARM program currently operates Raman lidars (RLIDs) at the Southern Great Plains (SGP) site in Oklahoma (since 1996), the Eastern North Atlantic (ENA) site in the Azores (since 2015 after relocation from Darwin, Australia), and the third ARM mobile facility (AMF3) at Oliktok Point, Alaska (since 2014; currently "down" due to operational difficulties). All three systems, which incorporate a similar design, transmit at 355 nm and use nine detection channels for measurement of elastic backscatter and Raman backscatter due to vibrational transitions in atmospheric H<sub>2</sub>O (at 408 nm) and N<sub>2</sub> (at 387 nm), and rotational transitions in O<sub>2</sub> and N<sub>2</sub> (at 353 nm and 354 nm). Raw photon counting and analog voltage data are recorded with a vertical resolution of 7.5 m and temporal resolution of 10 s. These raw data are then further averaged in time and height and used to compute various value-added data products (VAPs) such as profiles of water vapor mixing ratio, temperature, aerosol backscatter, aerosol extinction and linear depolarization ratio.

## Southern Great Plains



## Eastern North Atlantic




## North Slope of Alaska



### Raman lidar / Vaisala DIAL / AERI / Radiosonde Intercomparison (SGP)

Goal: evaluate the newly developed water vapor DIAL with operational sensors (5/15/17-6/12/17)

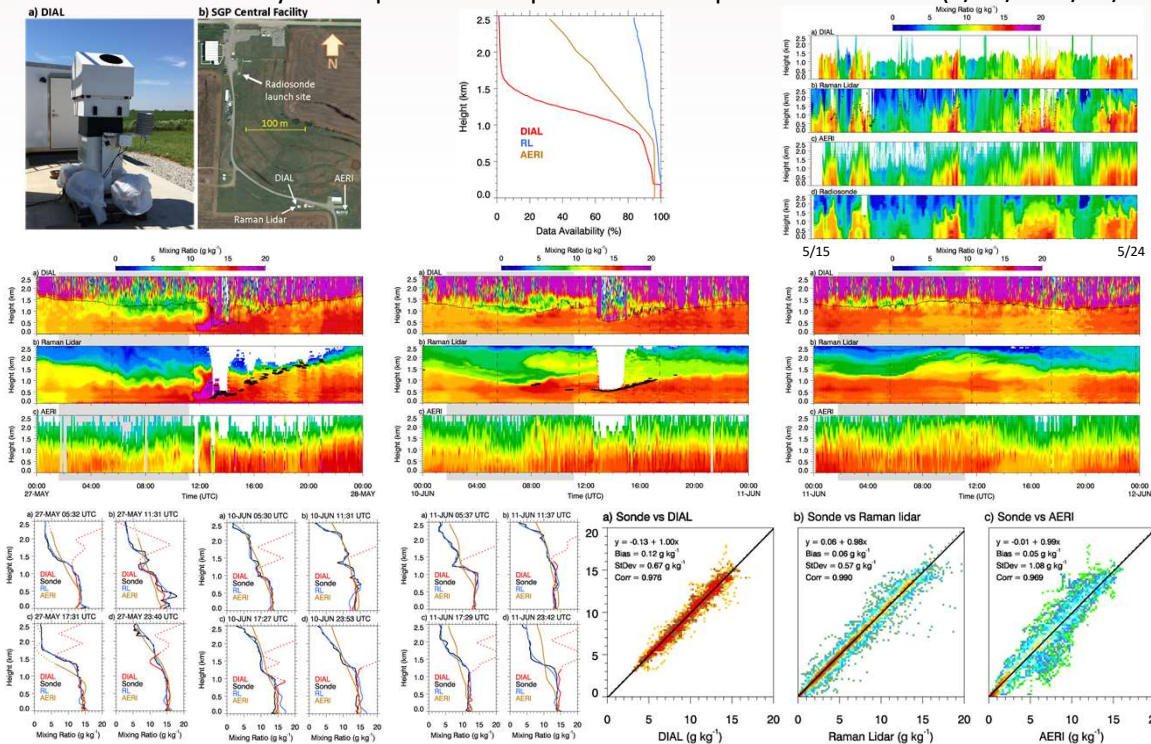

The LabVIEW code that operates the three systems had become increasingly contorted since it was first developed over 20 years ago, and had diverged into three separate versions for the three lidar systems. It was completely rewritten last year, with a single version now operating the three systems (coded to take into account hardware differences between the systems).

